



Nedstick alt. gjutning

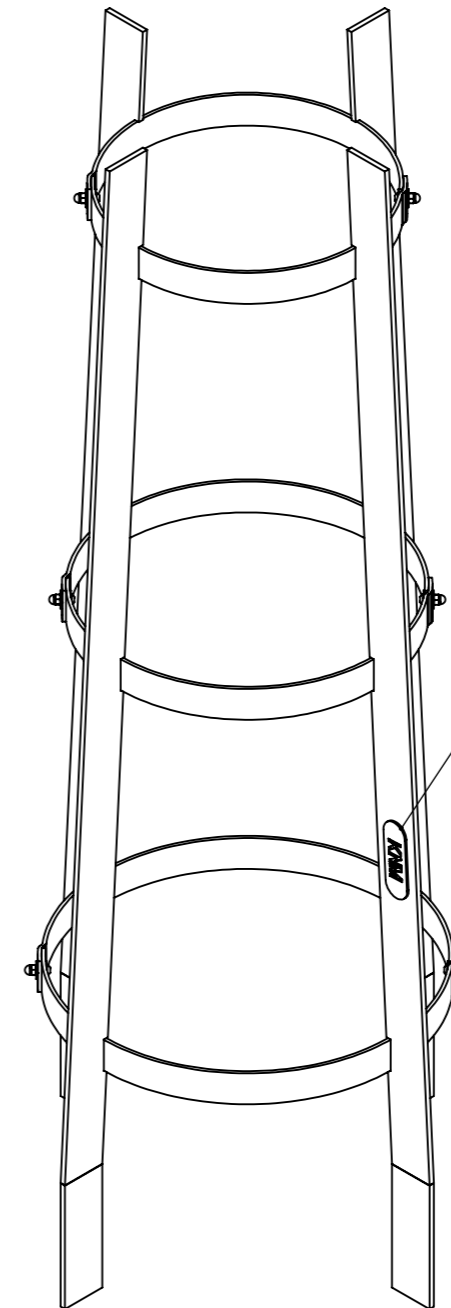



Fot infästning

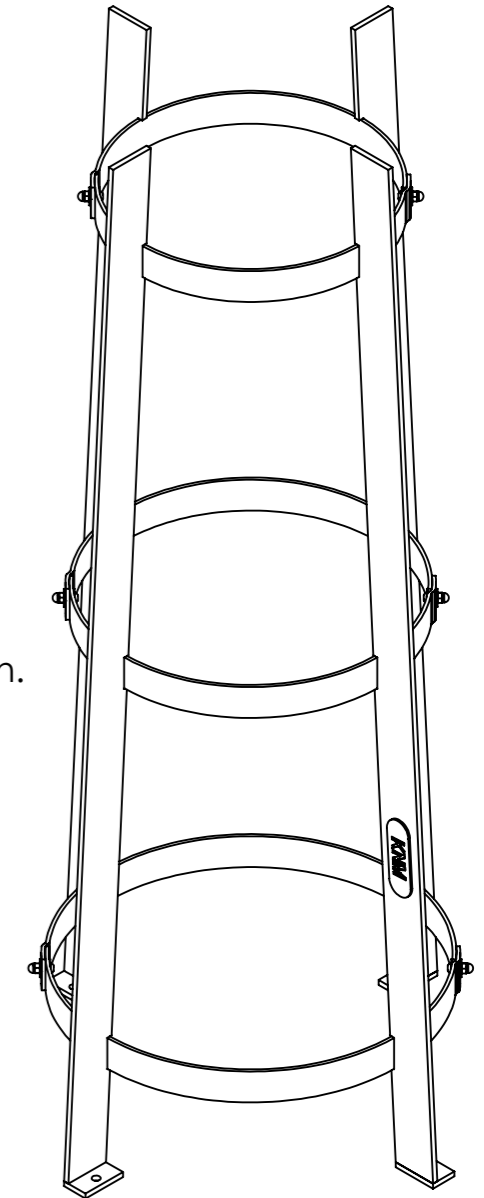

Hattmutter MHM A4
DIN 1587
M8
Antal: 6st

Rund bricka RB A2
DIN 125
8,4
Antal: 12st

Maskinskruv MRT A4
DIN 7985
M8 x 20
Antal: 6st

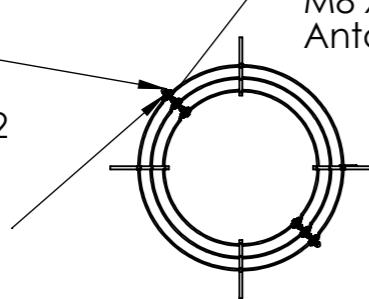

Svetsas enligt gängse verkstads praxis.

| | | | | | | | | | | | | |
|--|--|--|--|--|---|--|----------------------|--|---|--|----------------|--|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS | | | FINISH: Obehandlad alt. Varmförzinkas enligt SS-EN ISO 1461 & Lackerad i standard RAL-kulör. | | DEBURR AND BREAK SHARP EDGES | | DO NOT SCALE DRAWING | | REVISION B | | | |
| SURFACE FINISH: | | | | | | | | | Parken Träskydd KNM TRAFIKSYSTEM AB | | | |
| TOLERANCES: | | | | | | | | | | | TITLE: | |
| LINEAR: | | | | | | | | | | | DWG NO. | |
| ANGULAR: | | | | | | | | | | | 300-603650-001 | |
| | | | | | | | | | | | A3 | |
| DRAWN PAUL OLSSON | | | SIGNATURE | | DATE 2017-01-27 | | SCALE: 1:20 | | SHEET 1 OF 4 | | | |
| CHK'D | | | | | | | | | | | | |
| APPV'D | | | | | | | | | | | | |
| MFG | | | | | | | | | | | | |
| Q.A | | | | | MATERIAL: Cortén stål alt. EN 10025-2:2004 S235JR | | | | | | | |
| | | | | | WEIGHT: | | | | | | | |